


VARIABLE REACH TOP LOADING ARM | E2112

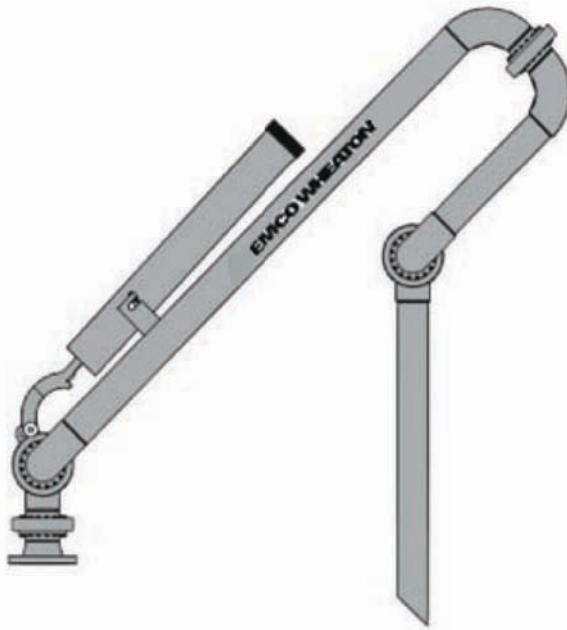

5 year limited warranty on D2000 World Series swivel joints.

Versatility of reach makes this arm ideal for application where more than one compartment can be reached without re-spotting the vehicle. See spotting map.


Standard vertical range of motion for the loading arm is 55° (park position) to -20° (load position). Maximum vertical range of movement up to 95° with spring cylinders.

Standard arms feature the D2000 World Series swivel joints for ultra low maintenance & the easy to adjust spring cylinder balance.

- ☞ Pipe size: 2" through 12"
- ☞ Materials: Carbon steel, Carbon steel / Aluminum, Stainless steel


Riser connection options

Loading arms shown in the park position

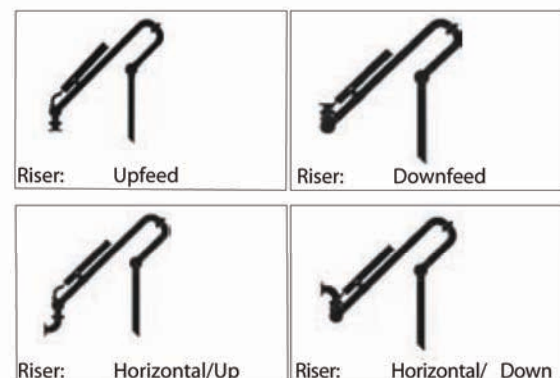


E2112

Dimensions and technical data

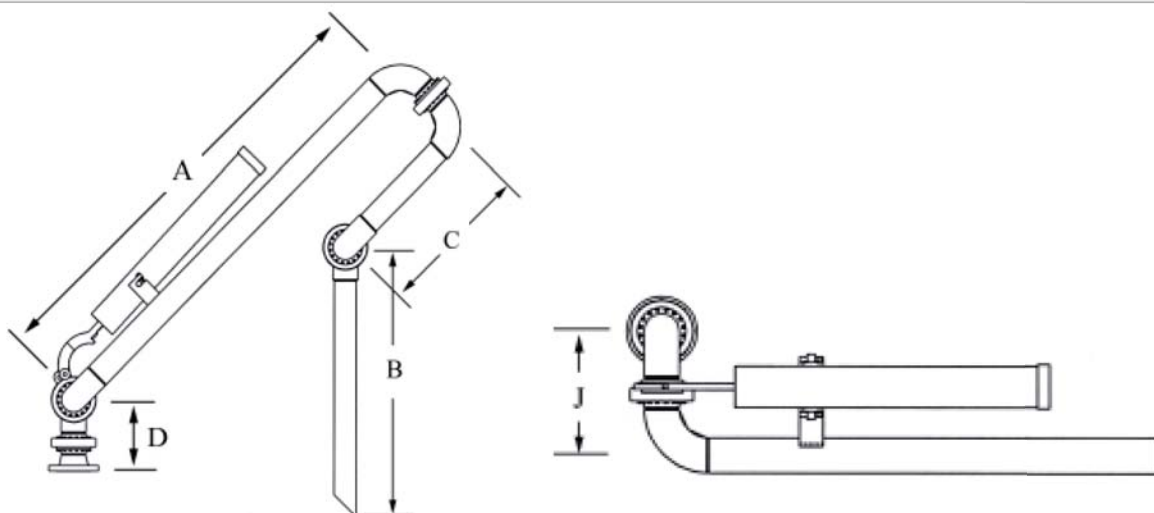

Dimensions

	D	J	L
2"	9.99"	10.11	10.11"
3"	11.86"	13.11	13.11"
4"	14.11"	16.11	16.11"

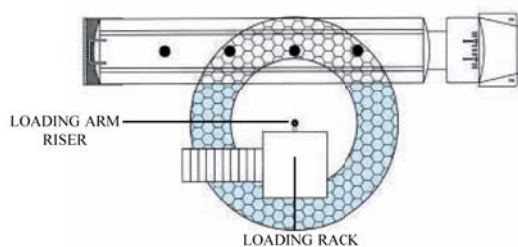

EMCO WHEATON

A Gardner Denver Product

EMCO WHEATON USA INC

9111 Jackrabbit Road · Houston, Texas 77095 · USA

Phone +1 281 856-1300 · Fax +1 281 856-1325

www.emcowheaton.com · sales-us@emcowheaton.com

*Better by
Design*

Whilst the content of this leaflet has been edited with the greatest care, we are not liable for any errors and/or omissions. Subject to change without notice.

ILTA
SUPPLIER

MEMBER
PEI
PUMPED STORAGE